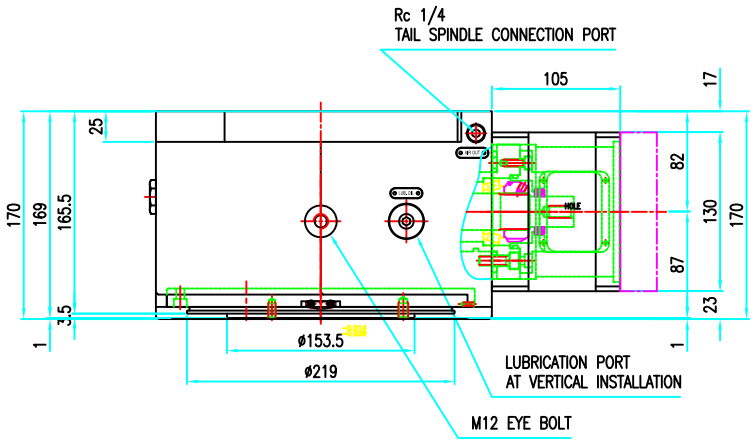

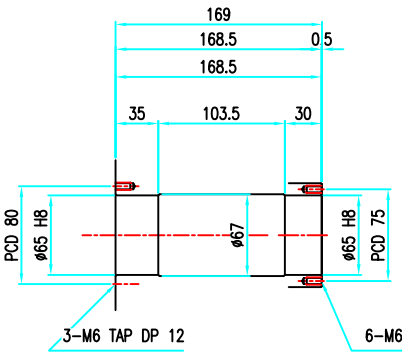

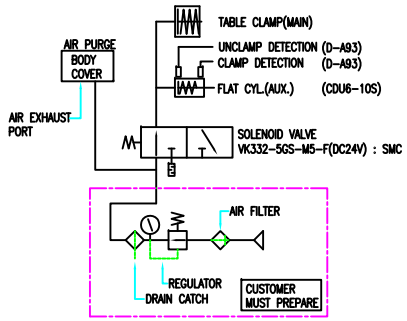

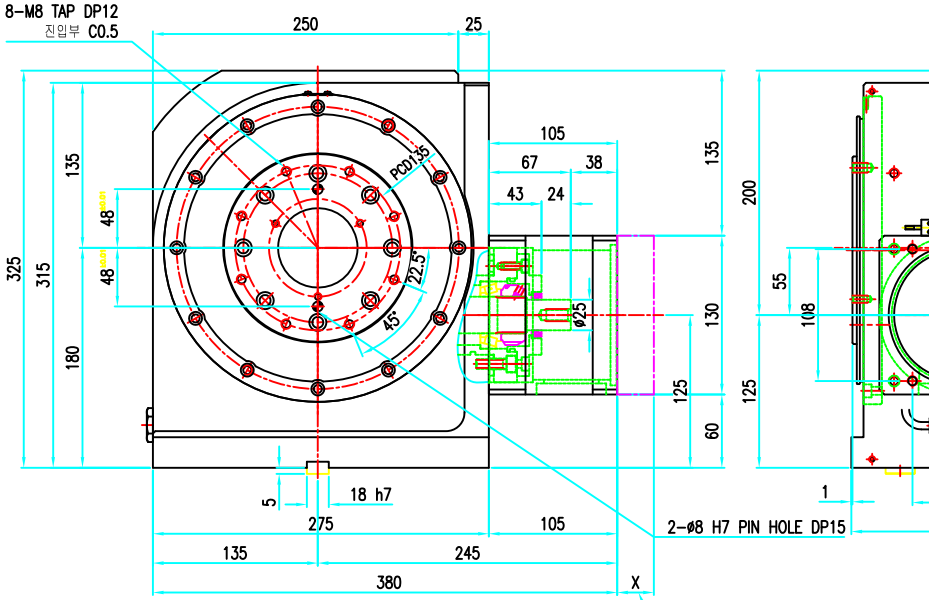

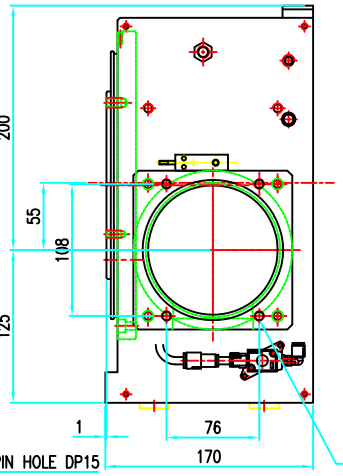

SPINDLE CENTER HOLE

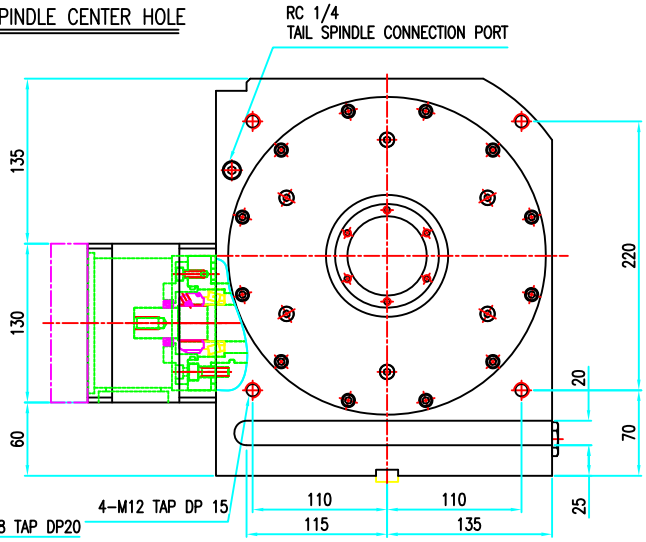

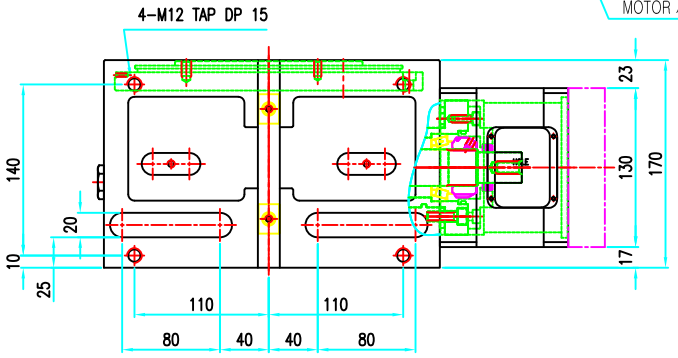

SDRE-240SH SPECIFICATIONS

INDEXING ACCURACY	± 12 sec	BACK LASH	0.008~0.012 mm
REPEATABILITY	± 3 sec	MAXIMUM PNEUMATIC	0.7 Mpa
MAXIMUM ROTATION SPEED	TABLE 100 min⁻¹	ALLOWABLE MASS OF WORK	HORIZONTAL 250 kg
	MOTOR 3,000 min⁻¹		VERTICAL 125 kg
CLAMPING TORQUE	600 N/m	TOTAL REDUCTION RATIO	1/30
	PNEUMATIC 0.5 Mpa	MASS OF ROTARY TABLE	kg
ALLOWABLE LOAD F	0,000 KN	ALLOWABLE LOAD FxL	0,000 N/m
ALLOWABLE LOAD FxL	000 N/m	ALLOWABLE CUTTIONG TORQUE	000 N/m

절삭가공 허용차 (±)	지시없는 모서리 : C	재질	-	수량	-
0.5 초과 6 이하 0.05	지시없는 라운딩 : R				
6 초과 30 이하 0.1	승인	열처리	-	척도	1/3
30 초과 120 이하 0.15	검도			중량	KG
120 초과 315 이하 0.3					
315 초과 1000 이하 0.3					
1000 초과 2000 이하 0.5	설계 K.N.H 14.08.17	표면처리	-		
명 (테프크닉) 주상치수 0.5					

I.P.S CO.LTD

기계명 HYPOID ROTARY INDEX TABLE

SDRE-240SH(1/30)

품명 INDEX TABLE ASS'Y

-

품번 SDR24-S-H00