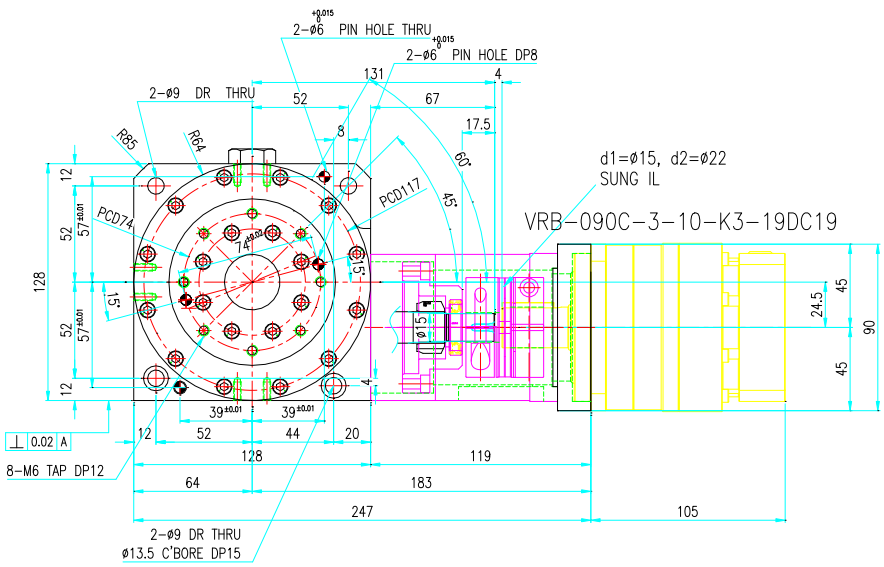

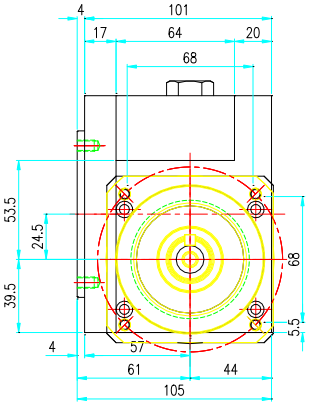

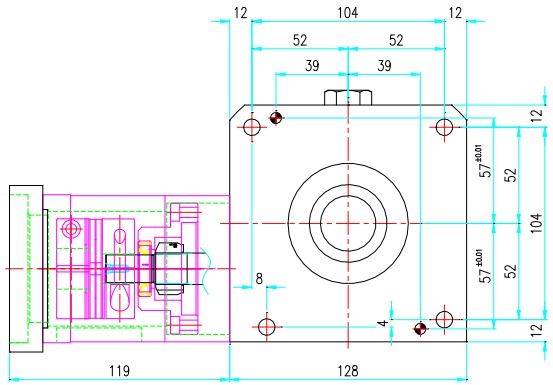

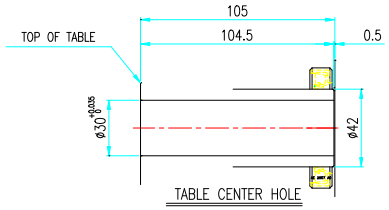

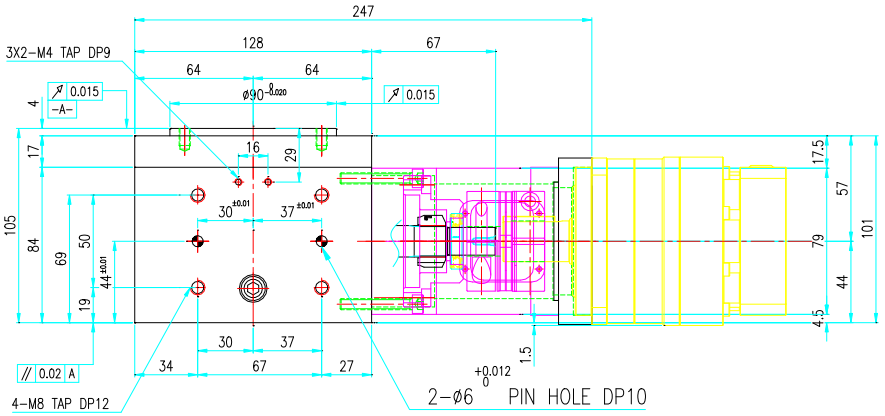

HGRT-130-1STAGE SPECIFICATIONS			
INDEXING ACCURACY	± 20 sec	BACK LASH	0.015~0.020 mm
REPEATABILITY	± 8 sec	REDUCTION RATIO	1/40
ROTATION RUN OUT	0.020mm	SPINDLE DEAD-END RUN OUT	0.020mm
MAXIMUM ROTATION SPEED	TABLE 75 min' / MOTOR 3,000 min'	ALLOWABLE MASS OF WORK	HORIZONTAL:150 kg / VERTICAL:90 kg
ALLOWABLE MAX MOTOR POWER	200w-1.0Kw / 23 N.m	ALLOWABLE MASS OF LOAD	HORIZONTAL:530Nm / VERTICAL:310Nm
TABLE SUPPORT BEARING	CROSS ROLLER BEARING	WEIGH	9.8Kg

NOTE.
1. ?????? ????? ?? ?? ???.

I.P.S CO.LTD
??? HYPOID DRIVE
HGRT 130-1STAGE
? ? ASS'Y
1/3
? ? D R T - N 1 3 - 1 0 0 A

A3(420x297)